

## FLUSH DIAPHRAGM

ANC4B 316 stainless steel or black anodised aluminium switchcase.

IP66/IP67 certified housing.

SIL2 - IEC61508 proven reliability.

Calibrated adjustment scale.

Pressure Settings from 100 mBar to 34 Bar.

Single or dual microswitch option. Adjustable deadband option.

Wetted parts NACE MR-01-75 compliant.

Manual reset pushbutton option.

**ATEX Certified Option**

CE  II1G Ex ia IIC

T6 Tamb -50 to +78°C

T5 Tamb -50 to +93°C

T4 Tamb -50 to +128°C

## P1100 GUARDIAN INDUSTRIAL & ATEX Exia CERTIFIED PRESSURE SWITCH



The range incorporates a flush diaphragm for settings of between 0.1 and 34 bar (2 to 500 PSI). Dual microswitch and adjustable deadband options are available as detailed on the opposite page. For specification and introduction to the Guardian switch range refer to pages 10 & 11.

### SPECIFICATION

**Wetted parts** : 316 St. steel

**Diaphragm** : Viton

**Pressure Limitations** : Please refer to range sheets. All switches can be subjected to a full vacuum.

**Process connections** : 2" BS EN1092-1 PN40 flange. Other sizes available.

FLUSH DIAPHRAGM  
FLANGE MOUNTED

The fitting of dual microswitches may increase the deadband by a factor of two.

ADJUSTMENT RANGE (BAR)	ADJUSTMENT RANGE (PSI)	MAX WORKING PRESS. (BAR)	DEADBAND (BAR)	DIAPHRAGM CODE	SPRING CODE
24 - 34	350 - 500	40	<3.4	15	B
14 - 24	200 - 350	40	<2.4	15	G
8.0 - 18	120 - 260	40	<1.8	15	R
3.0 - 13	45 - 185	40	<1.3	15	0
0.5 - 6.0	10 - 90	40	<0.6	15	1
0.1 - 1.7	2 -24	40	<0.2	32	1

# PART NUMBER BREAKDOWN

## MICROSWITCH OPTIONS

- 01 = SINGLE SWITCH
- 02 = DUAL SWITCHES
- 03 = USE 01
- 04 = USE 02
- 05 = SINGLE FOR Exia USE
- 06 = DUAL FOR Exia USE

- 0C = MANUAL RISING
- 0D = MANUAL FALLING
- 0E = DUAL HIGH CURRENT DC SWITCHING
- 0K = DPDT MICROSWITCH
- 0M = SINGLE HIGH CURRENT DC SWITCHING

## ADJUSTABLE DEADBAND

- 07 = SINGLE SWITCH - STANDARD
- 08 = SINGLE SWITCH - USE FOR Exia
- 09 = MANUAL AND AUTO (RESET RISING)
- 0A = MANUAL AND AUTO (RESET FALLING)


PLEASE REFER TO MICROSWITCH RATINGS ON PAGE 11.

<b>SPRING CODE</b> SEE RANGE SHEET	<b>DIAPHRAGM CODE</b> SEE RANGE SHEET	F = FLUSH DIAPHRAGM FLANGE MOUNTED S = 316 STAINLESS
---------------------------------------	--	---

(S) P 1 1 0 1 / V 0 1 0 N 1 5 / F S 2 X

<b>SWITCHCASE</b> S = STAINLESS STEEL  IF ALUMINIUM CASE REQUIRED LEAVE BLANK	<b>DIAPHRAGM</b> V = VITON STANDARD N = NITRILE	10 = STD N = STANDARD ADJUSTER A = SECONDARY ADJUSTER (FOR DUAL SETTINGS AND ADJ. DEADBAND) F = FIXED ADJUSTER - REFER TO SALES
		<b>BS EN1092-1 FLANGE 2"</b> (REPLACES BS4504) 2 = PN40 FLANGE 0 = SPECIAL - SEE TEXT 50, 65, 80 & 100MM SIZES AVAILABLE

**FIG. 2 TYPE P1100 GUARDIAN FLUSH DIAPHRAGM PRESSURE SWITCH**

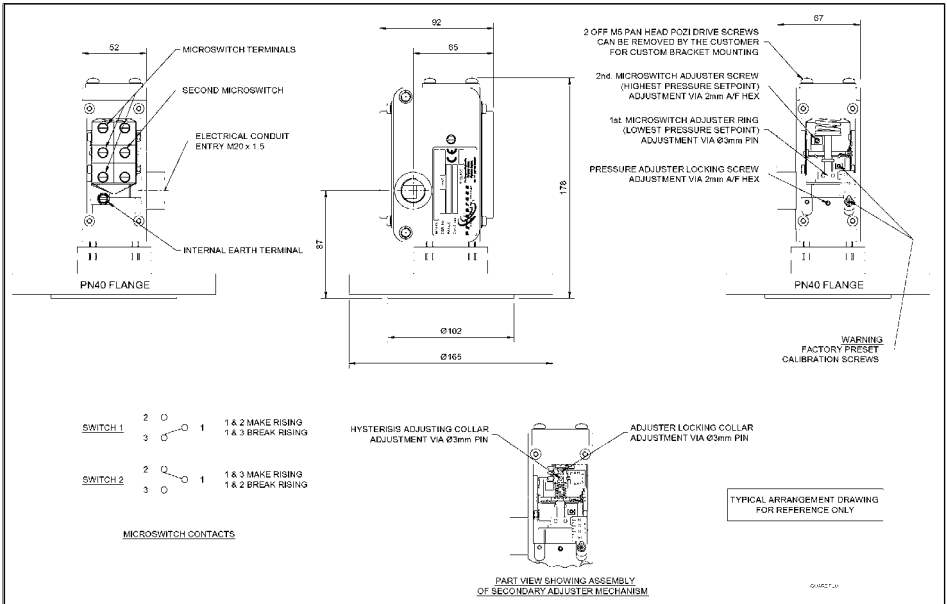

# GUARDIAN INDUSTRIAL & ATEX Exia SWITCHES


## INTRODUCTION

The Guardian **pressure, differential pressure, temperature, level and flow** switches are a part of our extensive range of specialist process sensors. They utilise the expertise gained from over 50 years experience of designing and manufacturing control devices for industrial, marine and hazardous area applications.

These switches are constructed with either a robust aluminium or stainless steel enclosure. The aluminium casting is black anodised and supplied with 316 stainless steel covers. The stainless steel case is a natural finish. Covers are gasketed and sealed to achieve an environmental seal to IP66 & IP67 standards. The internals utilise a unique mechanism designed by the engineers at PYROPRESS to produce a wide range, low switching differential and excellent repeatability. This combined with a variety of microswitches, mountings and sensor options has produced a switch range suitable for all weatherproof and intrinsically safe applications.

## CALIBRATION

The design features a simple form of calibration adjustment against a scale plate. This allows users to either order units with a specific setting, or stock a mid range setting and then calibrate to suit the application. Calibration is performed on the opposite side of the switch to the electrical connections, and can be set safely with the switch supply live. On removal of the adjustment cover a small grub screw can be loosened allowing the adjusting ring to be turned with a small Tommy bar or Allen key. The setting is read from the centre of the red indicating ring against the calibrated scale plate.

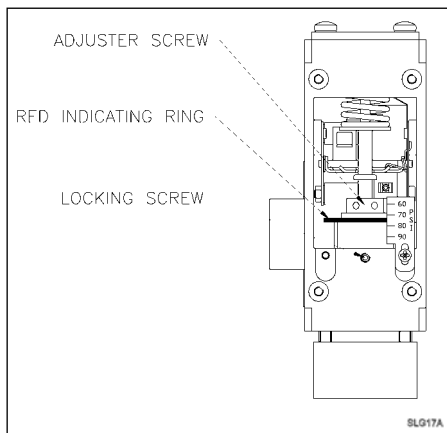

Calibration procedures for dual microswitches and adjustable switching differential switches are detailed on the operating and maintenance instructions supplied with each switch.

# TECHNICAL SPECIFICATION

**Switchcase and covers :** ANC4B 316 stainless steel switchcase with 316 stainless steel covers or black anodised aluminium switchcase and 316 stainless steel covers. Optional 304 stainless steel mounting bracket.

**Microswitch :** SPCO/SPDT. Options include single or twin switch assemblies for simultaneous or separately adjustable set points, adjustable switching differential, manual reset and noble metal contacts for use on intrinsically safe circuits.

## Microswitch rating

Standard microswitch : 6 Amps @ 480 V.AC  
: 10 Amps @ 250 V.AC & 125 V.AC  
: 5 Amps @ 30 V.DC & 0.5 Amps @ 125 V.DC  
Adjustable deadband and high : 10 Amps @ 250 V.AC or DC  
Current DC switching

**Electrical Connections :** Screwed terminals direct onto microswitch, suitable for cable up to 2.5 mm<sup>2</sup>. (Manual reset microswitch is supplied with 6BA solder tags).

**Electrical Conduit Entry :** M20 x 1.5 straight entry. Adaptors are available.

**Environmental Protection :** Switches have been tested and certified by an external test house to IP66 in accordance with BS EN 60529 : 1992. In addition further internal tests confirm that the switchcase meets the requirements of IP67.

**Vibration and shock parameters :** Switches were subjected to Lloyds Register Type Approval System Test Specification No.1 Clause 130 Vibration Test 142 and shock tested to BS EN 60068-2-27 : 1987.


**Temperature Limitations:** Pressure, Vacuum and Differential Pressure.

**Process :** Diaphragm actuated unless otherwise stated -50 to +90°C (Nitrile) or -20 to +150°C (Viton). Piston actuated -40 to +120°C (Nitrile), or -20 to +150°C (Viton) or -60 to +150°C (PTFE). **Ambient :** -10 to +80 Deg.C.

**Storage :** -60 to +80°C. (For temp, level and flow refer to specific pages).

**Certification:** All switches are CE certified and marked in accordance with the following EU directives. Industrial : 2006/95/EC (Low Voltage Directive). Exia : 94/9/EC ATEX coded CE Ex II1G Exia IIC. CAT 1 (Zone 0) areas Special conditions for safe use. (Category 1, Zone 0) Aluminium may only be used when the ignition hazardous assessment shows that there is not risk of ignition from incensive, impact or abrasion sparks.

**Accuracy:** 1% @ 20°C.



The Pyropress Engineering Company Ltd.  
Bell Close, Newnham Industrial Estate,  
Plympton, Plymouth. Devon PL7 4JH England.  
Tel: +44 (0)1752 339866  
Fax: +44 (0)1752 336681  
E-mail: sales@pyropress.com  
Website: www.pyropress.com  
Revision: D 06/09