

LOW PRESSURE

ANC4B 316 stainless steel or black anodised aluminium switchcase to IP66 standards.

Calibrated adjustment scale.

Settings from 8 to 250 mBar.

Single or dual microswitch option.

Wetted parts NACE MR-01-75 compliant.

ATEX Flameproof version

CE Ⓜ II2GD Exd IIB + H₂
T6 Ta -60 to +75°C, T5 Ta +90°C

ExtD A21 IP66

T85°C Ta -50 to +75°C, T100°C Ta +90°C

ATEX Intrinsically safe version

CE Ⓜ II1G Exia IIC T6 Ta -50 to +78°C
T5 Ta +93°C, T4 Ta +128°C

II1D ExiaD 20 IP66 T200°C

Ta -50 to +70°C

(For resistor certification refer to page 45)

PF261 TITAN ATEX Exd, Exia CERTIFIED & INDUSTRIAL LOW PRESSURE SWITCH



This range of switches employs a non-reinforced elastomer sensing element for settings between 8 and 250 mBar. A special feature of the Titan switch is the separation of the flameproof and adjustment compartments allowing adjustment of the set point with power on and the switch in operation. Reliable and proven design concepts from our established range of switches have also been incorporated. This provides a very competitively priced, lightweight and durable sensor. For specification and introduction to the Titan switch range please refer to pages 44 and 45.

ADJUSTMENT RANGE (MBar)	ADJUSTMENT RANGE "WG"	MAX WORKING PRESSURE (BAR)	DEADBAND (MBar)	SPRING CODE	DIAPHRAGM CODE
50 - 250	20 - 100	7.0	6 - 20	G	3
8 - 128	5 - 50	5.0	3 - 12	G	4

SPECIFICATION

Wetted parts : 316 St. steel

Diaphragm : Nitrile or Viton

Process connection: 1/4" BSP.P or NPT female

Process temperature limitations:


Nitrile: -25 to +95°C

Viton: -10 to +150°C

PART NUMBER BREAKDOWN

B = ATEX Exd CERTIFIED O = ATEX Exia CERTIFIED A = INDUSTRIAL		DIAPHRAGM MATERIAL 8 = NITRILE 9 = VITON		MOUNTING BRACKET G = DIAPHRAGM CODE 3 H = DIAPHRAGM CODE 4 J = 2" PIPE BRACKET	
A = ALUMINIUM CASE S = ST. STEEL CASE		SPRING CODE (SEE RANGE SHEET)	DIAPHRAGM CODE (SEE RANGE SHEET)	ELECTRICAL CONNECTION A = M20 STRAIGHT B = M20 ANGLED C = 1/2" NPT STR. STRAIGHT	
SWITCH TYPE PF261					
↓		↓	↓	↓	↓
P F 2 6 1 S 1 B / 8 G F S 4 1 / H A					
↑		↑	↑	↑	
1 = 1 x SPDT SWITCH 2 = 2 x SPDT SWITCH DUAL SWITCHES ARE MECHANICALLY LINKED TO PROVIDE DPDT SWITCHING ACTION		PRESSURE HOUSING FS = 316 STAINLESS STEEL		PROCESS CONNECTION 1 = 1/4" BSP.P FEMALE 2 = 1/4" NPT FEMALE	

NOTE: RESISTORS ARE INDICATED BY THE PREFIX "PR" IN PLACE OF "PF".

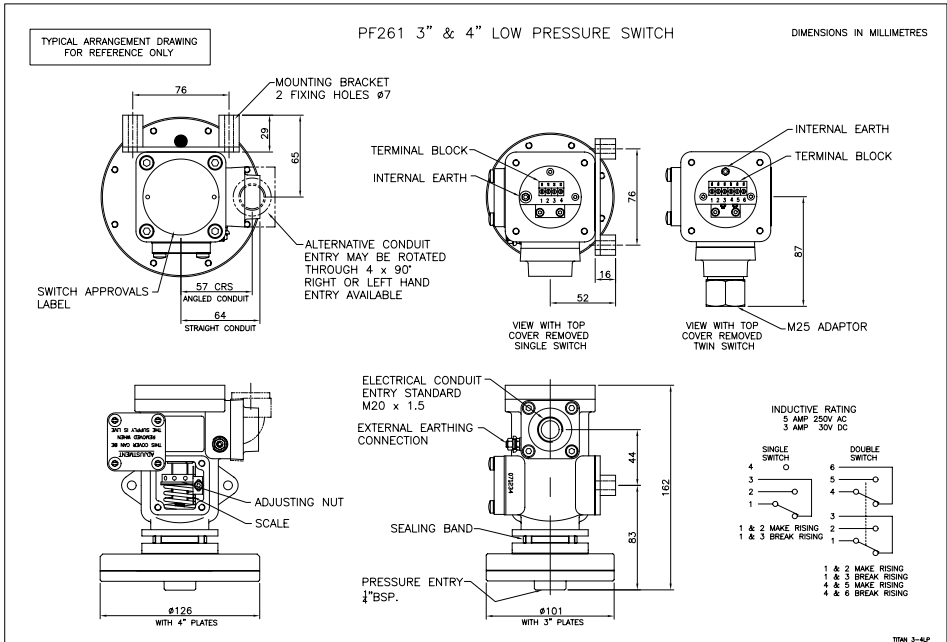

TITAN (XPB) ATEX Exd, Exia INDUSTRIAL SWITCHES

INTRODUCTION


The Titan **pressure, differential pressure, temperature, level and flow** switches are designed for use in environments where explosive gases and dust can be present (e.g. Gas fields, Oil rigs and Chemical plants etc.) and have been ATEX certified for CAT 1 Exia IIC T6, T5 & T4 and CAT 2 Exd IIB +H² T6 & T5.

These switches are manufactured from a high quality casting which offers robust construction and protection to IP66 for use within heavily polluted industrial and marine environments. A special feature of the instruments is the separation of the flameproof and adjustment compartments allowing for safe on-site adjustment of the set point with power on and the switch in operation.

The TITAN Exd certified switches must be installed in accordance with BS EN 60017-14. The certification allows for mounting against a wall or bulkhead with the minimum flamepath distances specified not being applicable.

CALIBRATION

The design features a simple form of calibration adjustment against a scale plate. This allows users to either order units with a specific setting, or stock a mid range setting and then adjust to suit the application. This can be set safely with the switch supply live. On removal of the adjustment cover the adjusting ring can be turned with a small Tommy bar or Allen key. The setting is read from the centre of the red pointer ring against the calibrated scale plate. Rotation to the left will increase the set point and to the right decrease the set point. The adjustment mechanism incorporates a friction device to ensure set point will not change under vibration conditions.

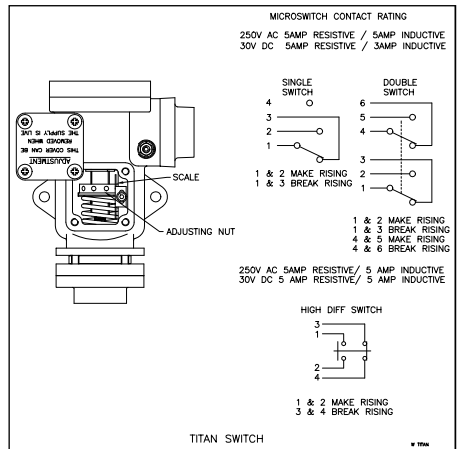

When we are requested to supply switches set at a specific point we can guarantee setting accuracy of less than 2%.



TITAN Exd



TITAN Exia (IS)



TITAN Exia (IS)
WITH RESISTORS



The Pyropress Engineering Company Ltd.
Bell Close, Newnham Industrial Estate,
Plymouth, Plymouth. Devon PL7 4JH England.
Tel: +44 (0)1752 339866
Fax: +44 (0)1752 336681
E-mail: sales@pyropress.com
Website: www.pyropress.com
Revision: E 04/10

TECHNICAL SPECIFICATION

Switchcase and covers : ANC4B 316 stainless steel or black anodised aluminium.

Microswitch : 1 x SPCO/SPDT or 2 x SPCO/SPDT gold plated silver contacts. Dual switches are mechanically linked to provide DPDT switching action, reset of switches could be up to 3% apart. Dual microswitches may increase deadband by a factor of two.

Microswitch rating

5 Amps @ 250 VAC resistive and inductive.

5 Amps @ 30VDC resistive, 3 Amps @ 30 VDC inductive.

Electrical connections : Terminals suitable for cable 0.5 - 2.5 mm².
(Max 1.5mm² for dual microswitch version)

Electrical Conduit Entry : M20 x 1.5 straight or angled entry. ½” NPT via adaptors

Environmental Protection : Switches have been tested and certified by an external test house to IP66 in accordance with BS EN 60529 : 1992.

Vibration and shock parameters : Switches were subjected to Ministry of Defence Type Approval System Test Vibration DGS 350 Paras 0602 & 0603. Shock – BR3021.

Temperature Limitations : Pressure, Vacuum and Differential Pressure

Ambient : -50 to +85°C (standard) -60°C to 125°C (special).

Process : Diaphragm actuated* -50 to +90°C (Nitrile) or -20 to +150°C (Viton).
Piston actuated -40 to 120°C (Nitrile) or -20 to +150°C (Viton).

Storage* : -60 to +85°C.

* Unless otherwise stated

(for temperature, level and flow switches please refer to specific pages).

Certification : Switches are ATEX certified for gas and dust hazardous areas.

Exd Flameproof (with or without resistors)

CE Ex II2GD Exd IIB + H₂ T6 Ta -60 to +75°C, T5 Ta +90°C

ExtD A21 IP66 T85°C Ta -50 to +75°C, T100°C Ta +90°C

Special conditions for safe use. 1) No modifications must be made to the flamepaths of the unit without consultation of the drawings listed on the certificate. 2) If temperature of the cable entry could exceed 70°C, suitably rated cable must be selected based on the Tmax shown above.

Exia Intrinsically Safe (without resistors)

CE Ex II1G Exia IIC T6 Ta -50 to +78°C, T5 Ta +93°C, T4 Ta +128°C

II1D ExiaD 20 IP66 T200°C Ta -50 to +70°C

Exia Intrinsically Safe (with resistors)

CE Ex II1G Exia IIC T5 Ta -50 to +72°C, T4 Ta +122°C

II1D ExiaD 20 IP66 T200°C Ta -50 to +70°C

Special conditions for safe use. (Category 1, Zone 0) Aluminium may only be used when the ignition hazardous assessment shows that there is not risk of ignition from incandive, impact or abrasion sparks.

Accuracy : +/-1% at 20°C